

## Product Information Sheet

Re-Issue Date: 25/03/03

Page 1 of 3

### TERRA SAND

#### “NATURAL LOOK” PENETRATING SEALER

#### DESCRIPTION

TERRA SAND is a clear pale amber liquid based on a blend of fluor acrylic resins, silanes and siloxanes.

#### APPLICATION

TERRA SAND is suitable for a wide range of surfaces where a penetrating invisible sealer is required.

TERRA SAND can be used both internally and externally, especially around wet areas such as swimming pools. It does not change the appearance of the surface, nor will it exhibit yellowing characteristics. Typical surfaces TERRA SAND can be used on include the following:

- ◆ Sandstone
- ◆ Terracotta
- ◆ Limestone
- ◆ Cement
- ◆ Quarry Tiles
- ◆ Brick
- ◆ Grout

#### FEATURES

- Penetrating, invisible sealer.
- Contains a blend of broad spectrum soil resisting agents.
- Suitable for both indoor and outdoor applications.
- Contains a mildewcide and algaecide.
- Contains UV stabilisers.

#### BENEFITS

- Retains original look of surface.
- Protects against all water and oil based stains, eg coffee, wine, sauces, cooking oil, etc.
- Extremely versatile. Excellent water retarding properties during heavy rain conditions. Non slip even when wet.
- Minimises moss and mildew growth.
- Will not discolour on aging.

The Product Information Sheet supersedes all previous issues for this product. Information contained herein is offered in good faith as being true and accurate to the best of our knowledge, but as the conditions of use are beyond our control, no guarantees are either stated or implied.

Where health or safety data given discloses a risk to the user or the environment, it is the responsibility of the purchaser to pass on the information to employees who may be using the product, ensuring that adequate safety procedures are used, including good industrial hygiene.

#### *Tasman Chemicals Pty Ltd*

*Victoria: 1-7 Bell Grove, Braeside 3195 Ph: 61-3-9587 6777 Fax: 61-3-9587 5255*

*New South Wales: Suite 15, 380 Pennant Hills Road, Pennant Hills 2120 Ph: 61-2-9980 5999 Fax: 61-2-9484 8647*

*South Australia: 4/159 Williams Street, Beverley 5009 Ph: 61-8-8243 0644 Fax: 61-8-8243 0622*

*Tasmania: 1 Durham Road, Cooee 7320 Ph: 61-3-6432 1988 Fax: 61-3-6432 1989*

*Western Australia: 8 O'Connor Way, Wangara 6065 Ph: 61-8-9309 2100 Fax: 61-3-9309 2511*

*Queensland: Unit 12/172 Redland Bay Road, Capalaba, 4157 Ph: 61-7-3245 2862 Fax: 61-7-3245 2413*



## Product Information Sheet

**TERRA SAND**

**Page 2 of 3**

### **DIRECTIONS FOR USE**

1. The surface to be sealed must be completely clean and dry - free from grease, oil, paint, acid, efflorescence and traces of grout.
2. Newly laid areas need 7 - 10 days to allow mortar and grout to cure and dry prior to sealing.
3. Any stains and soiling on the tiles must be removed prior to sealing using a suitable detergent.
4. Allow the tiles to dry thoroughly prior to sealing by leaving for at least 24 hours after cleaning and washing.
5. Do not seal hot surfaces - all surfaces must be cool.
6. TERRA SAND is applied neat and using a clean paint brush coat the entire surface to be treated and allow to dry. Apply a second coat after another four hours. On very porous substrates additional coats may be required to provide adequate protection from soiling and staining.
7. Allow 24 hours for the product to fully cure before allowing the full use of the treated area.
8. Re-application of TERRA SAND may be necessary after a period of time dependent upon wear and tear.

### **COVERAGE**

One litre will cover approximately 15-25m<sup>2</sup> dependent on porosity of the surface being treated.

### **CLEAN UP**

Brushes must be cleaned with SLATE SEAL SOLVENT

The Product Information Sheet supersedes all previous issues for this product. Information contained herein is offered in good faith as being true and accurate to the best of our knowledge, but as the conditions of use are beyond our control, no guarantees are either stated or implied.

Where health or safety data given discloses a risk to the user or the environment, it is the responsibility of the purchaser to pass on the information to employees who may be using the product, ensuring that adequate safety procedures are used, including good industrial hygiene.

#### ***Tasman Chemicals Pty Ltd***

***Victoria:*** 1-7 Bell Grove, Braeside 3195 Ph: 61-3-9587 6777 Fax: 61-3-9587 5255


***New South Wales:*** Suite 15, 380 Pennant Hills Road, Pennant Hills 2120 Ph: 61-2-9980 5999 Fax: 61-2-9484 8647

***South Australia:*** 4/159 Williams Street, Beverley 5009 Ph: 61-8-8243 0644 Fax: 61-8-8243 0622

***Tasmania:*** 1 Durham Road, Cooee 7320 Ph: 61-3-6432 1988 Fax: 61-3-6432 1989

***Western Australia:*** 8 O'Connor Way, Wangara 6065 Ph: 61-8-9309 2100 Fax: 61-3-9309 2511

***Queensland:*** Unit 12/172 Redland Bay Road, Capalaba, 4157 Ph: 61-7-3245 2862 Fax: 61-7-3245 2413

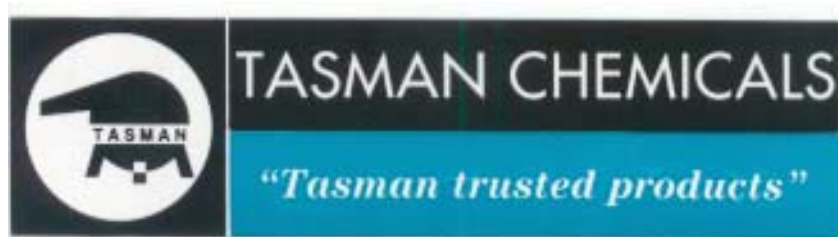

## Product Information Sheet

**TERRA SAND**

**Page 3 of 3**

**NOTE:**

1. As there are wide variations of surfaces and application procedures it is recommended that a small area be treated with TERRA SAND prior to treating the entire area. Once satisfied that the product and application techniques are satisfactory, the entire area can be treated.
2. TERRA SAND should not be used to re-coat any surface that has been previously treated with other sealers.
3. In order to gain maximum benefit from the use of TERRA SAND it is recommended that all soiling materials be removed from treated floors as soon as possible after a spill.

**HEALTH AND SAFETY INFORMATION**

See separate Material Safety Data Sheet available on request.

**PACKAGING**

- ◆ 1lt Metal Tin
- ◆ 4lt Metal Tin
- ◆ 10lt Metal Tin
- ◆ 20lt Metal Tin

The Product Information Sheet supersedes all previous issues for this product. Information contained herein is offered in good faith as being true and accurate to the best of our knowledge, but as the conditions of use are beyond our control, no guarantees are either stated or implied.

Where health or safety data given discloses a risk to the user or the environment, it is the responsibility of the purchaser to pass on the information to employees who may be using the product, ensuring that adequate safety procedures are used, including good industrial hygiene.

**Tasman Chemicals Pty Ltd**

**Victoria:** 1-7 Bell Grove, Braeside 3195 Ph: 61-3-9587 6777 Fax: 61-3-9587 5255

**New South Wales:** Suite 15, 380 Pennant Hills Road, Pennant Hills 2120 Ph: 61-2-9980 5999 Fax: 61-2-9484 8647

**South Australia:** 4/159 Williams Street, Beverley 5009 Ph: 61-8-8243 0644 Fax: 61-8-8243 0622

**Tasmania:** 1 Durham Road, Cooee 7320 Ph: 61-3-6432 1988 Fax: 61-3-6432 1989

**Western Australia:** 8 O'Connor Way, Wangara 6065 Ph: 61-8-9309 2100 Fax: 61-3-9309 2511

**Queensland:** Unit 12/172 Redland Bay Road, Capalaba, 4157 Ph: 61-7-3245 2862 Fax: 61-7-3245 2413